


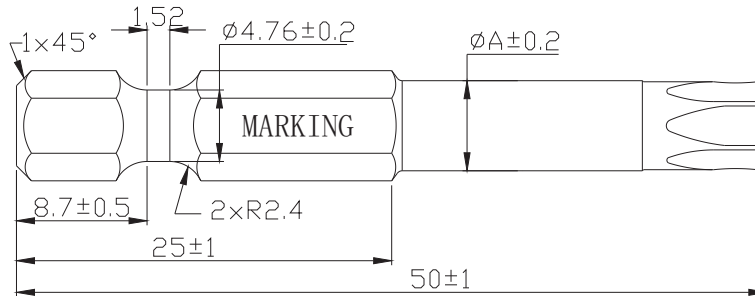


FOR:T10-T30



FOR:T40

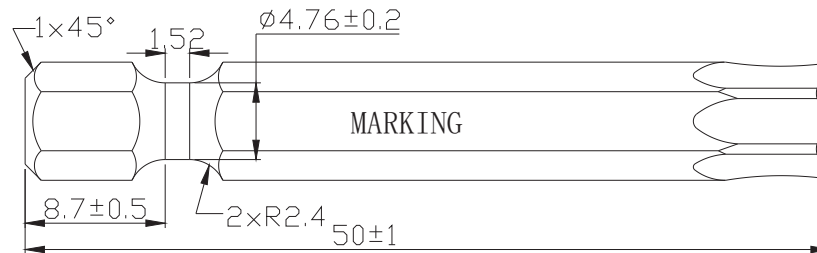

NOTES:

- MATERIAL:AISI -S2
材料: S2
- HARDNESS:HRC58-62; DECARBURIZATION-0.127mm PERMISSIBLE ON HEX, NONE ON TIP
硬度: HRC:58-62;柄部允许脱碳层0.127mm,但头部是不允许有脱碳现象
- BURRS:NONE PERMISSIBLE, HEX PORTION OF BIT MUST PASS THROUGH A 6.39 mm. HEX GAUGE AFTER STAMPING
批咀外观应无毛刺, 六方柄打字后应通过6.39毫米对边的内六方量规
- FINISH:SAND BLAST
表面处理: 喷砂
- MARKING:PER TABLE, ALL LETTERS CAPITALIZED, 1.5mm HIGHT MIN. CENTER
.MARKINGS IN INDECATED AREA STAMPING DIRECTION: FROM SHANK TO TIP.
按表格的要求打字, 字高最小1.5mm, 在批咀中央位置打字, 方向从柄部到头部
- NO RUST AFTER 120 HOURS SALT SPRAY TEST(32 DEGREE;95% RELATIVE HUMIDITY)
应通过120小时, 温度为32度, 相对湿度为95%的盐雾测试
- DIMENSIONS ARE IN mm.
尺寸单位:毫米

PART NO.	SIZE	A	MARKING	TORQUE (N.m)
W129603	TORX 10	3.5	T 10	4.5
W129604	TORX 15	4.0	T 15	7.7
W129605	TORX 20	4.5	T 20	12.7
W129606	TORX 25	5.0	T 25	19.0
W129607	TORX 27	5.5	T 27	26.9
W129608	TORX 30	6.0	T 30	37.4
W129609	TORX 40	/	T 40	65.1

DRAWING NO. W129603		TOL UNLESS SPECIFIED 1 PLC DEC: ±0.30 2 PLC DEC: ±0.10 ANGLES : ±0° 50'		ITEM 					
SCALE NO SCALE		REV 0		SIZE A4		SHEET 1/1		PART 1/4*50MM BIT TORX	
								IND	
								ALTERATIONS	
								SIGN	
								DATE	
DESIGNED		SUNCRAFT							
DRAWN		James		2010.4.1					
CHECKED									
APPROVED									
MATERIAL									